



# Pressure Gauges & Thermometers



## COMMITTED TO EXCELLENCE



Dedicated Sales Rep for Your Area



Vendor Consolidation



97% Fill Rate



Quality Control Program



Shipping within 24 Hours




Manufacturer of Seal Well Products



# PRESSURE GAUGES - LIQUID FILLED

- General Purpose - not for use with oxygen
- Ideal for use where vibration or pressure pulsation occurs
- Polycarbonate Window
- Glycerine Filled
- Bourdon Tube
- Ambient Operating Temperature: -4°F to 140°F (-20°C to 60°C)
- Maximum Media Temperature: 140°F (60°C)



## 2" DIAL PRESSURE GAUGES - LIQUID FILLED - LOWER & CENTER BACK MOUNT

- Brass or Lead Free Brass Connection
- Steel Case
- Available up to 200 PSI

## 2" DIAL STAINLESS STEEL PRESSURE GAUGES - LIQUID FILLED - LOWER & CENTER BACK MOUNT

- 304 Stainless Steel Case w/ vent plug
- Stainless Steel Internals and Connection
- Available 0-100 PSI

## 2-1/2" DIAL PRESSURE GAUGES - LIQUID FILLED - LOWER & CENTER BACK MOUNT

- 304 Stainless Steel Case w/ vent plug
- Brass or Lead Free Brass Connection
- Gauges 15 to 600 PSI are tapped for a Restrictor Screw (not included) 1000 PSI or more are tapped and include Restrictor Screw
- Available up to 10000 PSI Brass and 600 PSI for Lead Free Brass

## 2-1/2" DIAL STAINLESS STEEL PRESSURE GAUGES - LIQUID FILLED - LOWER & CENTER BACK MOUNT

- 304 Stainless Steel Case
- Stainless Steel Internals and Connection
- Gauges 15 to 600 PSI are tapped for a Restrictor Screw (not included) 1000 PSI or more are tapped & include Restrictor Screw
- Available up to 10000 PSI

## 4" DIAL PRESSURE GAUGES - LIQUID FILLED - LOWER MOUNT

- 304 Stainless Steel Case w/ vent plug
- Brass or Lead Free Brass Connection
- Available up to 10000 PSI Brass and 600 PSI for Lead Free Brass




# LOW PRESSURE GAUGES

## 2-1/2" DIAL LOW PRESSURE GAUGES - LOWER MOUNT

- General Purpose - not for use with oxygen
- Ideal for use in low pressure pneumatic systems
- For accurate measurement shown in inches of water (1/2 thru 10 PSI)
- Brass Connection
- Zero adjustment screw on dial
- Steel Case
- Acrylic Window
- Gauges are tapped and include Restrictor Screw
- Ambient Operating Temperature: -4°F to 140°F (-20°C to 60°C)
- Maximum Media Temperature: 140°F (60°C)



# PRESSURE GAUGES - DRY



- General Purpose - not for use with oxygen
- Acrylic Window
- Bourdon Tube
- Ambient Operating Temperature: -40°F to 140°F (-40°C to 60°C)
- Maximum Media Temperature: 140°F (60°C)

## 1-1/2" & 2" DIAL PRESSURE GAUGES - CENTER BACK MOUNT

- Brass or Lead Free Brass Male NPT Connection
- Steel or ABS Case
- Available up to 200 PSI

## 2" DIAL PRESSURE GAUGES - LOWER MOUNT

- Brass or Lead Free Brass Connection
- Steel or ABS Case
- Available up to 300 PSI

## 2-1/2" DIAL PRESSURE GAUGES - LOWER MOUNT

- Brass or Lead Free Brass Connection
- Steel Case
- Available up to 600 PSI

## 4" DIAL PRESSURE GAUGES - LOWER MOUNT

- Lead Free Brass Connection
- Steel Case
- Available up to 300 PSI

## 4-1/2" DIAL CONTRACTOR GAUGES - LOWER MOUNT

- Extra large dial face with re-adjustable pointer
- Lead Free Brass Connection
- 304 Stainless Steel Case and bezel
- Gauges 15 to 600 PSI are tapped for a Restrictor Screw (not included)
- Available up to 600 PSI




# WATER LEVEL GAUGE



## WATER LEVEL GAUGE

- Used to monitor the depth of water in a well
- 4-1/2" Aluminum rotating dial
- Brass 1/4" LM Connection
- Acrylic Window
- 304 Stainless Steel Case & bezel with side screws
- Brass pointer with black finish
- Bourdon tube - phosphor bronze, soft soldered

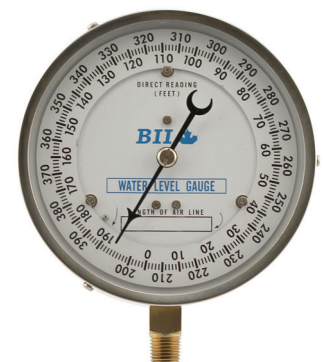

# WATER TEST / MAX PRESSURE INDICATOR GAUGE



- Provides a quick and easy way to test a wide range of pressure systems for leakage
- The indicator pointer is ideal for recording the maximum system pressure reached
- 3/4" garden hose connection complete with washer
- Attaches to hose bibbs, boiler drains and lawn faucets
- Used in sewer, drain and waste water systems




# TESTING GAUGES & ACCESSORIES



## GAS TEST GAUGE GAS TEST MANIFOLD W/O GAUGE

- Provides a quick and easy means of pressurizing and monitoring a gas system for leakage
- Comes completely assembled on a chrome plated steel hex manifold incorporating a sniffer (air) valve complete with a plastic cap
- 3/4" FPT connection

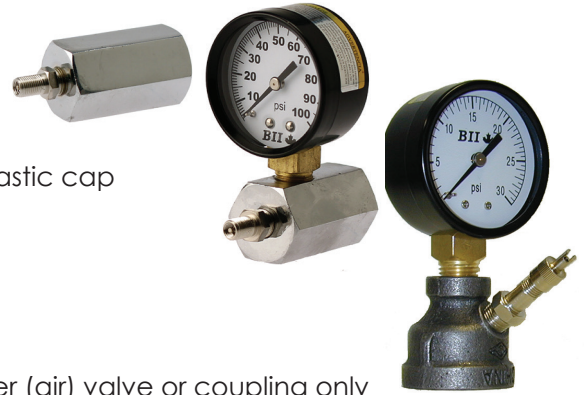

## GAS TEST MANIFOLD COUPLING

- Trouble free alternative to test gas systems
- Black malleable iron 3/4" x 1/4" reducing coupling
- Coupling drilled and tapped 1/8"
- Available assembled complete with pressure gauge and sniffer (air) valve or coupling only

# THERMOMETERS & TRIDICATORS



## 2-1/2" & 3" DIAL TRIDICATORS


- Accuracy: Pressure +/- 3% - 2% - 3% Temperature +/- 2%
- General purpose industrial combination pressure gauge/thermometer
- Bourdon tube and coiled bi-metal element
- Red (2-1/2") or Black (3") Steel Case
- Brass Connection
- Acrylic Window
- 3" Dial face comes with adjustable indicator

## 2-1/2" & 3" DIAL BI-METAL THERMOMETERS

- Accuracy: +/- 2% Working Range - Max Scale Value
- General purpose industrial thermometer
- Coiled bi-metal element
- Aluminum case
- Brass or Stainless Steel Thermowell
- Acrylic Window
- Thermowell Max Pressure Rating: 87 PSI (600 kPa)

## HOT WATER THERMOMETERS

- General purpose use with hot water
- Red Organic Kerosene Liquid
- Brass Thermowell

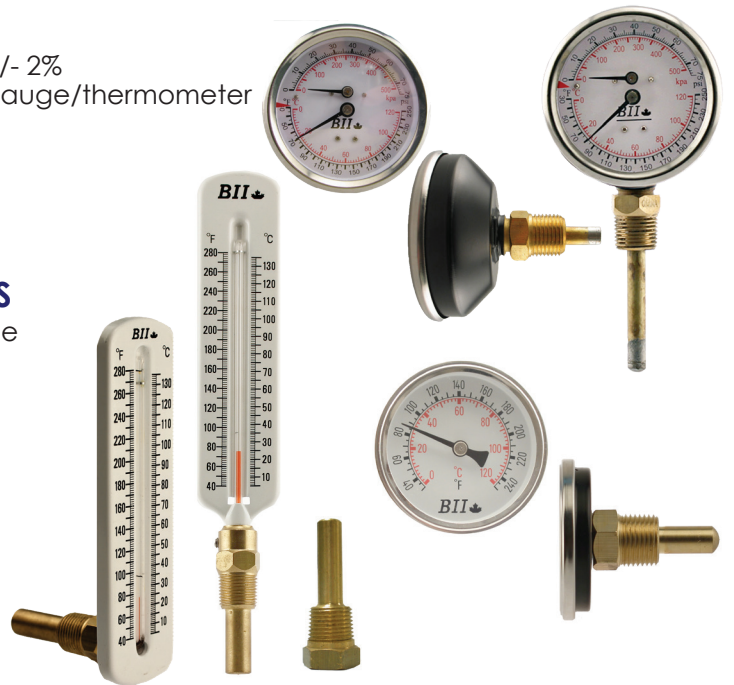

Water Well ♦ Plumbing & Heating ♦ Industrial ♦ Sump & Sewage ♦ Irrigation ♦ Pool & Spa

Head Office, Warehouse & Distribution Center - Milverton, Ontario CANADA  
Warehouse & Distribution Center - Sacramento, California USA  
Warehouse & Distribution Center - Charlotte, North Carolina USA

25 Whaley Ave., PO Box 310  
Milverton, ON N0K 1M0  
CANADA  
Telephone: 519-595-4444  
Fax: 519-595-4380  
Toll Free: 800-561-3164

[www.boshart.com](http://www.boshart.com)

**DISTRIBUTED BY:**