


# 0865(P)-NL SERIES NON-FREEZE LAWN FAUCETS WITH SELF DRAINING VACUUM BREAKER

## SPECIFICATION:

- Threads conform to ANSI/ASME B1.20.1
- Max Pressure Rating: 125 PSI
- Max Temperature Rating: 140°F (60°C)
- Hose thread outlet 3/4" GHT
- Integral anti-siphon vacuum breaker
- Chrome plated no lead body and tube
- Black cast hand wheel



## CERTIFICATION:

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified
- ASSE Standard 1019 Certified




| MATERIAL LIST |                 |
|---------------|-----------------|
| Part Name     | Material        |
| Handle Bolt   | No Lead Brass   |
| Name Plate    | Aluminum        |
| Handwheel     | Zinc            |
| Bonnet        | No Lead Brass   |
| Washer        | Stainless Steel |
| Packing       | Rubber NBR      |
| Washer        | Stainless Steel |
| Stem Pipe     | No Lead Brass   |
| Stem          | No Lead Brass   |
| Spring        | Stainless Steel |
| O-Ring        | Rubber NBR      |
| Spring Seat   | No Lead Brass   |
| Packing       | Rubber NBR      |
| Seat Holder   | No Lead Brass   |
| Seat Packing  | Rubber NBR      |
| Seat Screw    | No Lead Brass   |
| Body          | No Lead Brass   |
| Tube          | No Lead Brass   |
| Nipple        | No Lead Brass   |
| Flange Insert | Celcon          |
| Disc          | Celcon          |
| Packing       | Rubber NBR      |
| O-Ring        | Rubber NBR      |
| Body          | Celcon          |
| Cap           | No Lead Brass   |

**BOSHART**  
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)

# 0865(P)-NL SERIES NON-FREEZE LAWN FAUCETS WITH SELF DRAINING VACUUM BREAKER

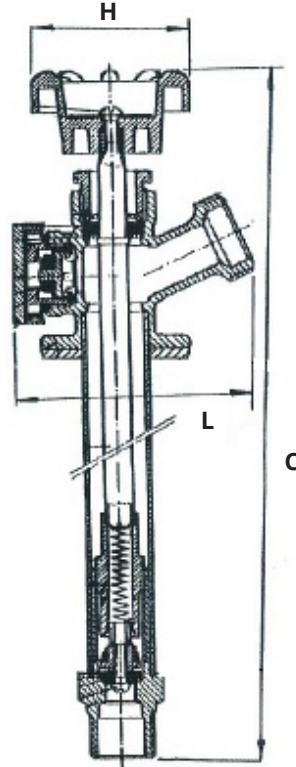

## DIMENSIONS

| Part No.    | Inlet Connection | H      |       | C      |        | L      |       | Weight grams |
|-------------|------------------|--------|-------|--------|--------|--------|-------|--------------|
|             |                  | inches | mm    | inches | mm     | inches | mm    |              |
| 0865-040NL  | 1/2" MPT x CxC   | 2.20   | 56.00 | 8.64   | 219.50 | 3.07   | 78.00 | 500          |
| 0865-060NL  | 1/2" MPT x CxC   | 2.20   | 56.00 | 10.65  | 270.50 | 3.07   | 78.00 | 540          |
| 0865-080NL  | 1/2" MPT x CxC   | 2.20   | 56.00 | 12.66  | 321.50 | 3.07   | 78.00 | 570          |
| 0865-100NL  | 1/2" MPT x CxC   | 2.20   | 56.00 | 14.67  | 372.50 | 3.07   | 78.00 | 600          |
| 0865-120NL  | 1/2" MPT x CxC   | 2.20   | 56.00 | 16.71  | 424.50 | 3.07   | 78.00 | 650          |
| 0865-140NL  | 1/2" MPT x CxC   | 2.20   | 56.00 | 18.72  | 475.50 | 3.07   | 78.00 | 690          |
| 0865P-040NL | 1/2" PEX         | 2.20   | 56.00 | 8.62   | 219.00 | 3.07   | 78.00 | 510          |
| 0865P-060NL | 1/2" PEX         | 2.20   | 56.00 | 10.63  | 270.00 | 3.07   | 78.00 | 520          |
| 0865P-080NL | 1/2" PEX         | 2.20   | 56.00 | 12.64  | 321.00 | 3.07   | 78.00 | 590          |
| 0865P-100NL | 1/2" PEX         | 2.20   | 56.00 | 14.65  | 372.00 | 3.07   | 78.00 | 640          |
| 0865P-120NL | 1/2" PEX         | 2.20   | 56.00 | 16.69  | 442.00 | 3.07   | 78.00 | 690          |
| 0865P-140NL | 1/2" PEX         | 2.20   | 56.00 | 18.70  | 475.00 | 3.07   | 78.00 | 710          |

**BOSHART**  
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)