

14H-GHT SERIES GIANT HIGH TEMPERATURE FILTER HOUSING

APPLICATION:


- Alcohols / Toluene / Xylene
- Gasoline
- Hot Water / Liquids
- Photographic
- Salt Water Fisheries
- Vegetable Oil

SPECIFICATION:

- Threads conform to ANSI/ASME B1.20.1
- Max Pressure Rating: 100 PSI
- Max Temperature Rating: 180°F (82°C)
- Mounting bosses molded in head for installation with mounting bracket
- Securely retained O-ring eliminates potential leaks due to misplacement
- Accepts industry standard cartridges (not included)
- Suitable for high pressure service
- Excellent alternative to stainless and carbon housings
- Durable glass-reinforced nylon construction



MATERIAL LIST	
Part Name	Material
Filter Head	Black Glass-Reinforced Nylon
Filter Bowl	Black Glass-Reinforced Nylon
O-Ring	Buna N

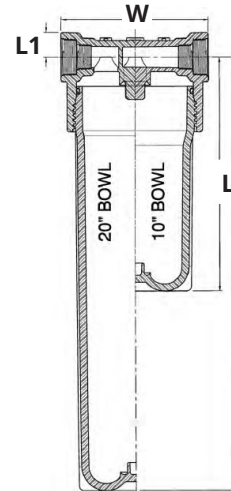

DIMENSIONS										
Part No.	Inlet/Outlet	Bowl	Flow Rate PSI @ GPM	W		L		L1		Weight grams
				inches	mm	inches	mm	inches	mm	
14H-GHT10BK-1015	1" & 1-1/2" FPT	Black	1 PSI @ 20 GPM *	7.54	130.60	11.94	311.60	1.27	287.00	667
14H-GHT20BK-1015	1" & 1-1/2" FPT	Black	1 PSI @ 25 GPM *	7.54	131.60	22.25	312.60	1.27	288.00	935

* Actual flow rates and pressure drop will be determined based on cartridge selection and fluid viscosity.



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com