


# SSBV2000 SERIES 316 STAINLESS STEEL BALL VALVE (THREADED)

## Specification:


- Threads conform to ANSI/ASME B1.20.1
- Max Pressure Rating: 2000 PSI WOG Non-Shock
- WOG pressure rating based on ambient temperature
- Max Temperature Rating: 450°F (232°C)
- Standard port design
- Two piece investment cast body
- Mounting pad
- Blow-out proof stem
- Stainless steel ball
- PTFE seats / PTFE stem packing
- Stainless steel locking handle with blue plastic sleeve



## Certification:

- NSF/ANSI Standard 372 Certified

MATERIAL LIST	
Part Name	Material
Body	CF8M 316 Stainless Steel
Cap	CF8M 316 Stainless Steel
Ball	CF8M 316 Stainless Steel
Stem	CF8M 316 Stainless Steel
Seat	PTFE
Gasket	PTFE
Washer	PTFE
Stem Packing	PTFE
Gland Nut	304 Stainless Steel
Lock Washer	304 Stainless Steel
Nut	304 Stainless Steel
Handle	304 Stainless Steel

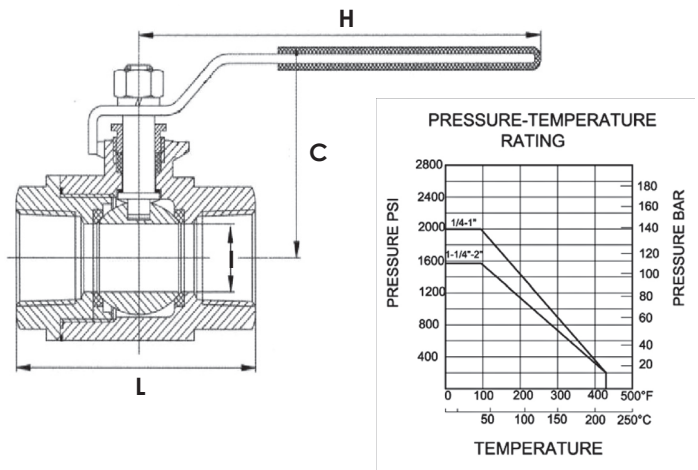

DIMENSIONS										
Part No.	Description	I		L		C		H		Weight
		inches	mm	inches	mm	inches	mm	inches	mm	grams
SSBV2000-02	1/4" FxF	0.37	10.00	2.12	54.00	1.65	42.00	4.17	106.00	240
SSBV2000-03	3/8" FxF	0.37	10.00	2.12	54.00	1.65	42.00	4.17	106.00	220
SSBV2000-05	1/2" FxF	0.50	13.00	2.44	62.00	1.81	46.00	4.17	106.00	320
SSBV2000-07	3/4" FxF	0.69	18.00	2.83	72.00	2.08	53.00	5.78	147.00	600
SSBV2000-10	1" FxF	0.88	22.00	3.34	85.00	2.28	58.00	5.82	148.00	890
SSBV2000-12	1-1/4" FxF	1.00	25.00	3.62	92.00	2.67	68.00	7.59	193.00	1210
SSBV2000-15	1-1/2" FxF	1.25	32.00	4.01	102.00	2.83	72.00	7.59	193.00	1750
SSBV2000-20	2" FxF	1.50	38.00	4.64	118.00	3.07	78.00	7.59	193.00	2680



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)