



0844(C)-NL SERIES NO LEAD BRASS STOP & WASTE VALVES

SPECIFICATION:


- Threads conform to ANSI/ASME B1.20.1
- Max Pressure Rating: 125 PSI
- Max Temperature Rating: 180°F (82°C)
- Black cast hand wheel

CERTIFICATION:

- NSF/ANSI Standard 61 & 372 Certified
- CSA Standard B125.1 Certified

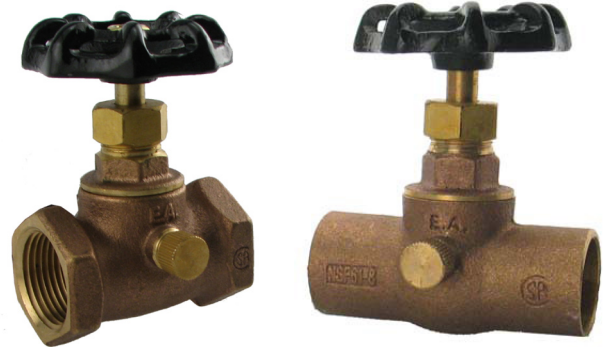

MATERIAL LIST	
Name	Material
Wheel Nut	Steel
Name Plate	Aluminum
Hand Wheel	Cast Iron
Stem	No Lead Brass
Packing Nut	No Lead Brass
Gland Packing	Rubber (NBR)
Bonnet	No Lead Brass
Body	No Lead Brass
Seat Packing	Rubber (NBR)
Seat Packing Screw	No Lead Brass
Drain Packing	Rubber (NBR)
Drain Cup Nut	No Lead Brass

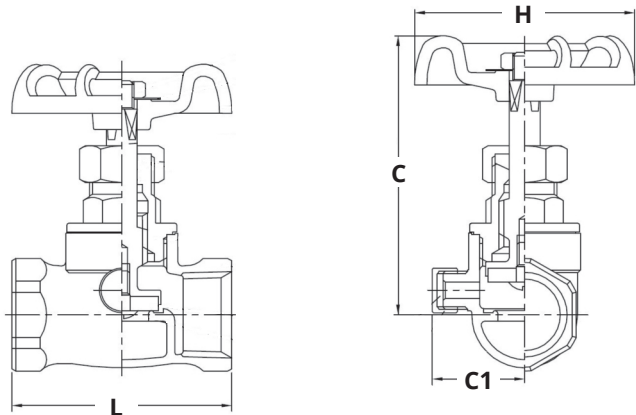

DIMENSIONS										
Part No.	Nominal Size	C1		H		L		C		Weight grams
		inches	mm	inches	mm	inches	mm	inches	mm	
0844-05NL	1/2" FPT	0.91	23.00	2.13	54.00	2.64	67.00	2.13	54.00	251
0844-07NL	3/4" FPT	0.94	24.00	2.13	54.00	2.64	67.00	2.17	55.00	281
0844C-05NL	1/2" CxC	0.91	23.00	2.13	54.00	2.64	67.00	2.17	55.00	212
0844C-07NL	3/4" CxC	0.94	24.00	2.13	54.00	2.64	67.00	2.72	69.00	248



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com