


08SV(A)(S)(T)-PFNL SERIES NO LEAD PUSH FIT SUPPLY VALVE

FEATURES:

- Designed for use on Copper, CPVC and PEX piping in plumbing and hydronic heating systems
- For CTS (Copper Tube Size) O.D. Sizes - 1/2" (0.625") 3/4" (0.875") 1" (1.125")
- Approved for use in both underground and behind the wall applications
- Eliminates the need for soldering, crimping or solvent welding
- Ideal for wet, hazardous and dry repairs in hard to access locations or where open flame could be a fire hazard for soldering
- Removable and Reusable, plastic disconnect tool is used to release the gripper ring, making for easy disconnection
- Each valve comes complete with integral Polysulfone tube support, required for use with PEX piping




SPECIFICATION:

- Max Pressure Rating: 200 PSI
- Max Temperature Rating: 200°F (93°C)
- Quarter Turn supply (stop) valves
- Forged DZR (Dezincification Resistant) No Lead Brass Body

CERTIFICATION:

- UPC (Uniform Plumbing Code) Standard ASSE 1061 Certified
- NSF/ANSI Standard 14, 61 & 372 Certified

MATERIAL LIST	
Part Name	Material
Body	No Lead Brass
Grip Ring	Stainless Steel
Release Ring	POM
Retaining Ring	POM
Spacer	Nylon
O-Ring	EPDM
Tube Support	Polysulfone

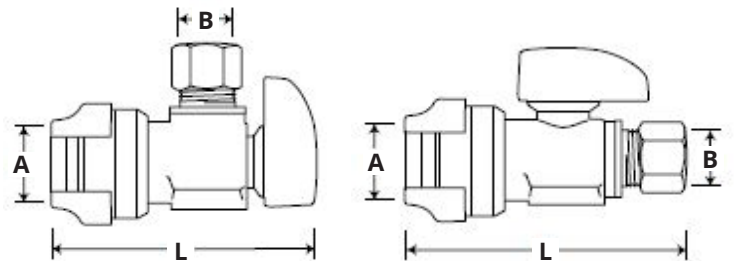

DIMENSIONS								
Part No.	Size Push Fit x Compression	A		B		L		Weight grams
		inches	mm	inches	mm	inches	mm	
08SVA-05PF02CPNL	1/2" x 1/4"	0.63	15.88	0.25	6.35	2.44	61.98	100
08SVA-05PFNL	1/2" x 3/8"	0.63	15.88	0.38	9.53	2.48	62.99	120
08SVS-05PFNL	1/2" x 3/8"	0.63	15.88	0.38	9.53	2.61	66.29	100
08SVT-05PF02CPNL	1/2" x 1/4"	0.63	15.88	0.25	6.35	2.62	66.55	140
08SVT-05PFNL	1/2" x 3/8"	0.63	15.88	0.38	9.53	2.62	66.55	140



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com