

# 14HK-SS SERIES STAINLESS STEEL HOUSING KIT EXTREME TEMPERATURE / PRESSURE SINGLE TUBE

## APPLICATION:

- Agriculture
- Chemical
- Industrial / Commercial
- Institutional
- Point of use
- Restaurant




## SPECIFICATION:

- Threads conform to ANSI/ASME B1.20.1
- Max Pressure Rating: 300 PSI (when filter has pipe plug installed)
- Max Temperature Rating: 300°F (149°C)
- Filter head held in place by stainless steel retainer ring
- Mounting bosses molded in head for installation with mounting bracket
- Housing kit comes complete with filter housing, mounting bracket, hardware and wrench
- Accepts industry standard cartridges (not included)
- For high pressure and hot water applications not suited for plastic housings



MATERIAL LIST	
Part Name	Material
Filter Head	Stainless Steel
Filter Bowl	Stainless Steel
Retainer Ring	Stainless Steel
O-Rings	Viton
Pipe Plug	Stainless Steel
Bracket	Stainless Steel
Hardware	Stainless Steel

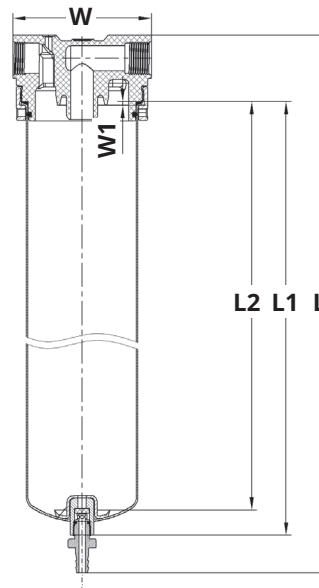

DIMENSIONS				
Part No.	Inlet/Outlet	Bowl Length	Flow Rate PSI @ GPM	Weight grams
14HK-SS10-07	3/4" FPT	10"	1 PSI @ 10 GPM *	3000
14HK-SS20-07	3/4" FPT	20"	1 PSI @ 15 GPM *	3500

DIMENSIONS										
Part No.	W		W1		L		L1		L2	
	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm
14HK-SS10-07	4.09	110.00	3.46	3.00	12.40	354.40	9.72	271.10	9.84	249.90
14HK-SS20-07	4.09	110.00	3.46	3.00	23.96	608.60	20.69	525.60	19.90	505.50

\* Actual flow rates and pressure drop will be determined based on cartridge selection and fluid viscosity.



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)