


# 1710(S) SERIES PVC IN-LINE CHECK VALVE

## SPECIFICATION:

- Threads conform to ANSI/ASME B1.20.1
- Max Working Pressure: 100 PSI @ 73°F (23°C)
- Max Temperature Rating: 140°F (60°C)

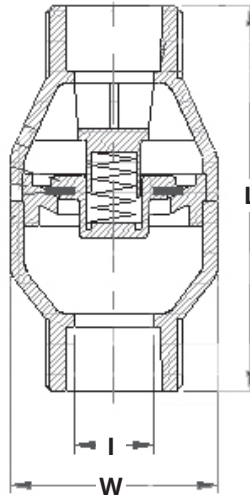

MATERIAL LIST	
Name	Material
Body	PVC
Poppet	PVC
Seat	PVC
Spring	Stainless Steel
Seal	EPDM

DIMENSIONS									
Part No.	Size	Connection Type	I		L		W		Weight grams
			inches	mm	inches	mm	inches	mm	
1710-05	1/2"	Threaded	0.67	17.00	4.13	105.00	2.20	56.00	145
1710-07	3/4"	Threaded	0.83	21.00	4.13	105.00	2.20	56.00	140
1710-10	1"	Threaded	1.10	28.00	5.24	133.00	2.87	73.00	250
1710-12	1-1/4"	Threaded	1.38	35.00	6.18	157.00	3.58	91.00	400
1710-15	1-1/2"	Threaded	1.54	39.00	6.18	157.00	3.58	91.00	430
1710-20	2"	Threaded	2.05	52.00	7.01	178.00	4.21	107.00	640
1710-30	3"	Threaded	-	-	8.66	219.96	5.65	143.51	1410
1710S-05	1/2"	Slip	0.67	17.00	4.13	105.00	2.20	56.00	144
1710S-07	3/4"	Slip	0.83	21.00	4.13	105.00	2.20	56.00	135
1710S-10	1"	Slip	1.10	28.00	5.24	133.00	0.00	73.00	245
1710S-12	1-1/4"	Slip	1.38	35.00	6.18	157.00	0.00	91.00	394
1710S-15	1-1/2"	Slip	1.54	39.00	6.18	157.00	0.00	91.00	418
1710S-20	2"	Slip	2.05	52.00	7.01	178.00	0.00	107.00	620

**BOSHART**  
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)