


09SGS SERIES PVC SLICE GATE VALVE

SPECIFICATION:

- Socket dimensions conform to ASTM D 2466 for Schedule 40 PVC
- Max Pressure Rating: 80 PSI
- Max Temperature Rating: 140°F (60°C)
- Built in Snap-Lock guarantees zero flow restriction during operation
- Cam-Lock function provides a 100% positive seal when shutoff is required



MATERIAL LIST	
Part Name	Material
Body	PVC
Body Cap	PVC
Handle	PVC
Retainer	PVC
Shaft	Stainless Steel
Gate	Polypropylene
Gate Seal	Rubber
O-Ring	Rubber

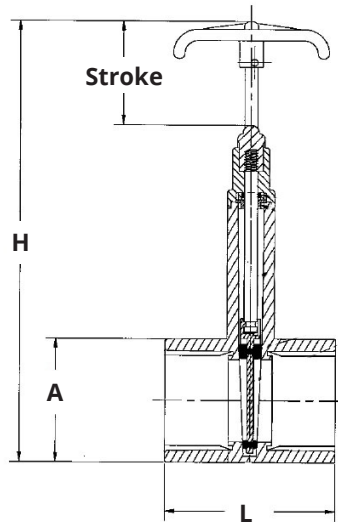

DIMENSIONS										
Part No.	Nominal Size	H (open)		L		A		Stroke		Weight
		inches	mm	inches	mm	inches	mm	inches	mm	grams
09SGS-15	1-1/2" Slip x Slip	8.47	215.14	3.24	82.30	2.38	60.45	2.00	50.80	250
09SGS-20	2" Slip x Slip	9.76	247.90	3.39	86.11	2.72	69.09	2.37	60.20	340
09SGSSP-15	1-1/2" Slip x Spigot	8.47	215.14	3.24	82.30	2.38	60.45	2.00	50.80	230
09SGSSP-20	2" Slip x Spigot	9.76	247.90	3.39	86.11	2.72	69.09	2.37	60.20	340

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com