


WTMLC-A SERIES LOCKING WATERTIGHT WELL CAPS FOR STEEL OR PVC WELL CASINGS

SPECIFICATION:

- Easy to install, easy access for maintenance
- Vermin proof with 2 large screened air vents (3/4" each)
- O-ring system to ensure reliable seal
- A second O-ring is used to seal cover and retainer ring, a positive compression seal is achieved by tightening a single set screw on a specially designed tapered surface ensuring a positive seal
- Locking feature provides a secure/tamper-proof installation
- Grounding terminal with bolt provided
- A well log is provided inside each cap to record installation data/specifications



MATERIAL LIST	
Description	Materials
Top	Aluminum
Set Screw	Stainless Steel
Gasket	NBR
Vent Housing	Brass
Vent Screen	Stainless Steel
Ground Bolt	Stainless Steel
Bottom	Aluminum
Bolts	Stainless Steel
Nuts	Stainless Steel

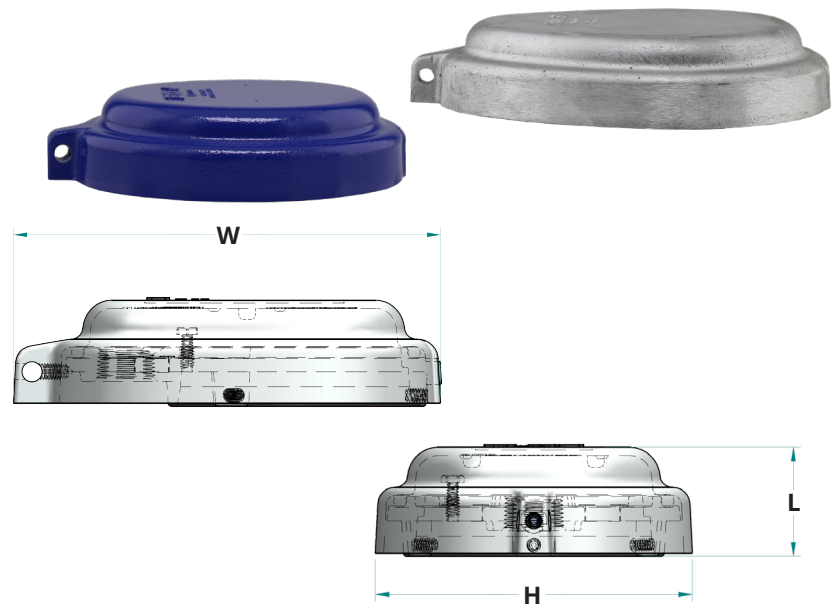

DIMENSIONS										
Part No.	Casing Size		Conduit Connection	L		H		W		Weight
	I.D.	O.D.		FPT	inches	mm	inches	mm	inches	
WTMLC-A04	4"	4-1/2"	1" FPT	9.38	238.25	2.33	51.10	6.78	172.20	1480
WTMLC-A045	4-1/2"	5"	1" FPT	8.30	210.82	2.40	60.96	8.05	204.47	1612
WTMLC-A045-BLUE*	4-1/2"	5"	1" FPT	8.30	210.82	2.40	60.96	8.05	204.47	1612
WTMLC-A05	5"	5-9/16"	1" FPT	7.40	187.96	2.40	60.96	10.35	262.89	1680
WTMLC-A05-BLUE*	5"	5-9/16"	1" FPT	8.50	215.90	2.40	60.96	8.75	222.25	1680
WTMLC-A056-BLUE*	5-5/8"	6"	1" FPT	9.15	232.41	2.40	60.96	8.70	220.98	1780
WTMLC-A06	6"	6-5/8"	1" FPT	8.30	210.82	2.40	60.96	11.30	287.02	1793
WTMLC-A06-BLUE*	6"	6-5/8"	1" FPT	8.30	210.82	2.40	60.96	11.30	287.02	1793
WTMLC-A06-12	6"	6-5/8"	1-1/4" FPT	9.60	243.84	2.40	60.96	9.40	238.76	1793
WTMLC-A066	6-5/8"	7"	1" FPT	10.05	255.27	2.45	62.23	9.65	245.11	1603

* Blue Power Coat Paint



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com