

# 14-(G)CB SERIES CARBON BLOCK - TASTE AND ODOUR CARTRIDGE

## APPLICATION:

- Designed to remove unpleasant tastes and odours as well as sediment
- High chlorine reduction, great dirt holding capacity and greatly reduced carbon fines
- Great alternative to traditional granular activated carbon where high chlorine reduction needed
- Suitable for residential, commercial and industrial applications
- Suitable for reverse osmosis system or point of use water dispensing system

## SPECIFICATION:



- Max Temperature Rating: 140°F (60°C)
- Max Pressure Rating: 120 PSI
- Filter media: Activated Carbon
- Filter core: Polypropylene
- End Cap: Polypropylene
- Netting: Polypropylene
- Gaskets: Neoprene

## CERTIFICATION:

- NSF/ANSI Standard 42 Certified



This Filter Cartridge is Tested and Certified by NSF International against NSF/ANSI Standard 42 for material requirements only.

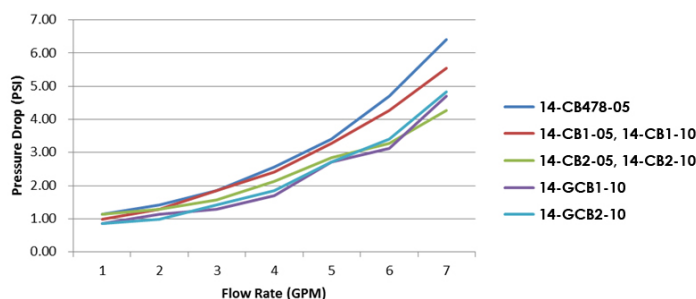

## DIMENSIONS

Part No.	Inner Diameter		Outer Diameter		Length		Micron	Flow Rate	Chlorine	Weight
	inches	mm	inches	mm	inches	mm	Rating	PSI Drop @ GPM	Capacity	grams
<b>STANDARD</b>										
14-CB478-05	1.00	25.40	2.50	63.50	4.88	123.83	5	2 PSI @ 1 GPM	2,112 @ 1 GPM	220
14-CB1-05	1.00	25.40	2.50	63.50	9.88	250.83	5	2 PSI @ 1 GPM	3,969 @ 1 GPM	600
14-CB1-10	1.00	25.40	2.50	63.50	9.88	250.83	10	2 PSI @ 1 GPM	3,969 @ 1 GPM	600
14-CB2-05	1.00	25.40	2.50	63.50	20.00	508.00	5	1 PSI @ 1 GPM	5,808 @ 1 GPM	750
14-CB2-10	1.00	25.40	2.50	63.50	20.00	508.00	10	1 PSI @ 1 GPM	5,808 @ 1 GPM	750
<b>GIANT</b>										
14-GCB1-10	1.00	25.40	4.50	114.30	9.88	250.83	10	4 PSI @ 3 GPM	10,560 @ 1 GPM	1170
14-GCB2-10	1.00	25.40	4.50	114.30	20.00	508.00	10	4 PSI @ 5 GPM	21,648 @ 1 GPM	2670

**NSF/ANSI Standard 42** - Drinking Water Treatment Units (Aesthetic Effects) - Covers point-of-use and point-of-entry (POU / POE) systems designed to reduce specific aesthetic, or non-health effects contaminants (chlorine, TDS, particulates) that may be found in drinking water that is considered to be microbiologically safe.

**Always Test Water** - Do not use this product with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the filtration system.

**Change Out** - Replacement filter cartridges have a limited service life. Changes in taste, colour and flow of the water (other liquid) being filtered are signals that replacement of the cartridge may be necessary.

**BOSHART**  
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)

© 2020 Boshart Industries Inc. All Rights Reserved.

BII-14-(G)CB-1220(2041)