

PLASTIC POPPET TYPE CHECK VALVES (SPRING ASSIST CLOSING)

BOSHART
INDUSTRIES

Product Booklet



Plastic Check Valves
Introduction Page
Page 2



297D & 290P
1/2" - 3/4" Flomatic Spring Check Valves
Page 3 & 4

FLOMATIC
VALVES



17PCV
3/4" - 2" Boshart Poppet Check Valves
Page 5



1710(S)
1/2" - 3" Boshart Spring Check Valves
Page 6



BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310
Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164
VISIT US ONLINE AT BOSHART.COM

For more information on installation,
adjustment, repair & operation, visit
Boshart Knowledge Base at
SUPPORT.BOSHART.COM



PLASTIC CHECK VALVES

Check Valves, sometimes referred to as non-return or one way valves, allow the flow of fluid in one direction only. The flow direction is typically indicated by an arrow on the valve body. The 17PCV series PVC Check Valves are commonly used in the installation of a submersible pump. Their purpose is to prevent the flow of fluid in the opposite direction and to maintain system pressure when the pump stops. Check valves work automatically and are opened by the pumps pressure against a low tension spring, normally ½ PSI or less cracking pressure (cracking pressure is the pressure it takes to open the valve). When the pump stops the valve starts closing automatically with assistance of the spring as the flow slows, and is completely sealed before it comes to a full stop. This eliminates flow reversal which would cause the poppet to slam against the seat causing hydraulic shock or water hammer. Without a check valve gravity would cause the water or fluid to flow in the reverse direction, draining system pressure and potentially causing damage to the pump and or piping system.

APPLICATIONS:

- Check valves are mainly used in potable water, irrigation, and wastewater (without solids) applications. Designed for cold potable water applications up to 400 feet. For hot water applications, special high temperature valves must be used.

Flow Rate/Velocity Chart For Check Valve Selection					
Nominal		Min 5ft./sec.		Max 7ft./sec.	
in	mm	GPM	LPM	GPM	LPM
3/4	19.05	7.00	26.50	9.00	34.07
1	25.40	13.00	49.21	17.00	64.35
1-1/4	31.75	19.00	71.92	27.00	102.21
1-1/2	38.10	28.00	105.99	39.00	147.63
2	50.80	49.00	185.49	69.00	261.19
2-1/2	63.50	77.00	291.48	107.00	405.04
3	76.20	110.00	416.40	154.00	582.95
4	101.60	196.00	741.94	274.00	1037.20
6	152.40	441.00	1669.37	617.00	2335.60

It is recommended that you select the size of pipe according to a water velocity of 5-7 ft/second.

Flow Coefficient (CV) is the flow rate through a valve in the fully open position, which will produce a differential pressure of 1 PSI. It is defined as the volume of water in US gallons per minute (GPM) at 60°F (15.5°C)

TEMPERATURE CORRECTION FACTOR FOR PVC VALVES

As temperature increases, working pressure decreases. The optimal working pressure for PVC valves is 150 PSI @ 73°F (22°C)

If the temperature increases above 73°F (22°C), use the PVC correction factor to determine working pressure.

Multiply the maximum working pressure by the correction factor.

Temperature	73°F (22°C)	90°F (32°C)	100°F (38°C)	110°F (44°C)	120°F (49°C)	130°F (54°C)	140°F (60°C)	150°F (66°C)
PVC Correction Factor	1.00	0.75	0.62	0.50	0.40	0.30	0.22	Not Recommended

User Responsibility Statement: It is the user's sole responsibility to determine the product's suitability for its intended use. For full details, visit Boshart Industries [Reference Documents](#) for our User Safety Responsibility Statement and other important documents.

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310
Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164
VISIT US ONLINE AT BOSHART.COM

For more information on installation, adjustment, repair & operation, visit Boshart Knowledge Base at SUPPORT.BOSHART.COM



297D POLYACETAL & 290P POLYPROPYLENE SERIES - SPRING LOADED CHECK VALVE

FEATURES:

- Acetal body check valve
- Can be used horizontally and vertically

SPECIFICATIONS:

- One-piece Extra Heavy Duty valve body molded from Rigid PVC
- FPT threads conform to ASME /ANSI B 1.20.1 American National Standard Taper Pipe Threads
- Viton O-Ring provides better chemical resistance
- Cracking Pressure is equal to or less than 1/2 PSI

CERTIFICATIONS:

- NSF/ANSI Standard 372 Certified (Drinking Water System Components - Lead Content)

RATINGS:

- Max Inlet Pressure: 150 PSI 10 bar
- Max Temperature Rating: 180°F (82°C)




297D

MATERIAL LIST		
No.	Part Name	Material
1	Valve Body	Polyacetal
2	Poppet	Polyamid
3	O-Ring	Viton
4	Spring	302 Stainless Steel

290P

MATERIAL LIST		
No.	Part Name	Material
1	Valve Body	Polypropylene
2	Poppet	Polypropylene
3	O-Ring	Viton
4	Spring	302 Stainless Steel

Flow Coefficient (CV) is the flow rate through a valve in the fully open position, which will produce a differential pressure of 1 PSI. It is defined as the volume of water in US gallons per minute (GPM) at 60°F (15.5°C)

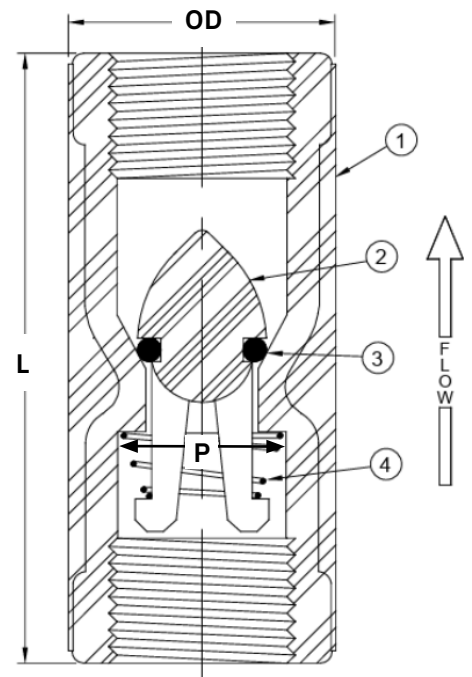

DIMENSIONS

Part No.	Connection Size	Flow Coefficient (CV)	Length (L)		Outside Diameter (OD)		Port Diameter (P)		Weight	
			in	mm	in	mm	in	mm	lbs	grams
175239	1/2" FPT	2.5	1.10	28.00	2.60	66.00	0.50	12.70	0.06	27.22
175359	3/8" FPT	1.7	0.91	23.00	2.13	54.00	0.38	9.65	0.04	18.14
175357	1/2" FPT	2.5	1.10	28.00	2.60	66.00	0.50	12.70	0.06	27.22
175358	3/4" FPT	6	1.34	34.00	3.14	80.00	0.75	19.05	0.09	40.82


BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310
Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164
VISIT US ONLINE AT BOSHART.COM

For more information on installation, adjustment, repair & operation, visit Boshart Knowledge Base at SUPPORT.BOSHART.COM



Head Loss Chart - Models 297D and 290P

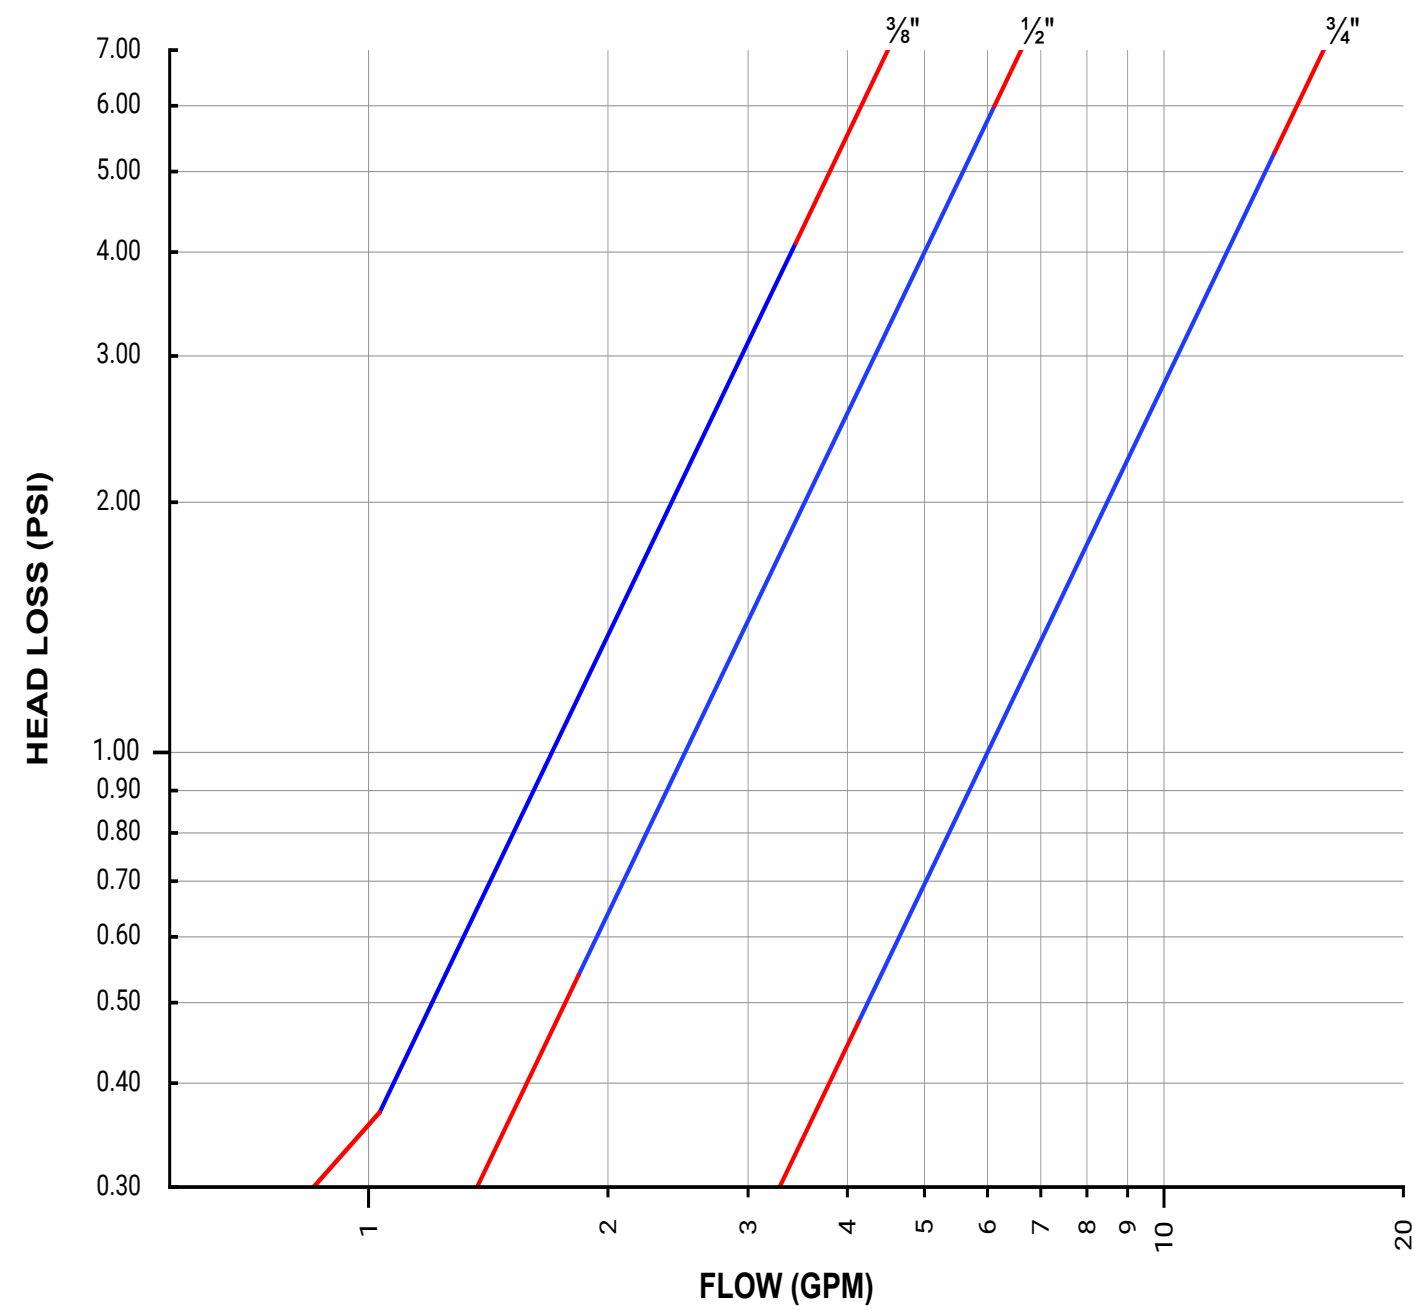

17PCV SERIES - POPPET TYPE PVC CHECK VALVE (SPRING ASSIST CLOSING)

FEATURES:

- Flow diverter minimizes turbulence and friction loss
- Stainless Steel spring closes valve against pressure, eliminating flow reversal & minimizing hydraulic shock
- Stemless acetal poppet guide for long-lasting, quiet, trouble free operation in both vertical and horizontal installations
- One-piece Extra Heavy Duty valve body is suitable for submersible pump applications (see maximum load capacity on chart below)
- Can be used vertically or horizontally

SPECIFICATIONS:

- Valve body molded from Rigid PVC
- FPT threads conform to ASME /ANSI B 1.20.1 specifications
- NBR Sealing Gasket ensures a positive seal
- Screws conform to ASME B18.6.3 - Machine Screws, Tapping Screws, and Metallic Drive Screws (Inch Series)
- Cracking Pressure is equal to or less than 1/2 PSI

CERTIFICATIONS:


- NSF/ANSI Standard 372 Certified (Drinking Water System Components - Lead Content)

RATINGS:

- Max Working Pressure: 150 PSI at 73°F (1034 kPa at 22°C) (refer to temperature derating chart on page 2 if used above 73°F)



MATERIAL LIST		
No.	Part Name	Material
1	Valve Body	Rigid PVC
2	Spring	304 Stainless Steel
3	Poppet Disc	304 Stainless Steel
4	Sealing Gasket	NBR (Nitrile Buna-N Rubber) Durometer 45
5	Stemless Poppet Guide	Acetal
6	Screw	Stainless Steel Plastite

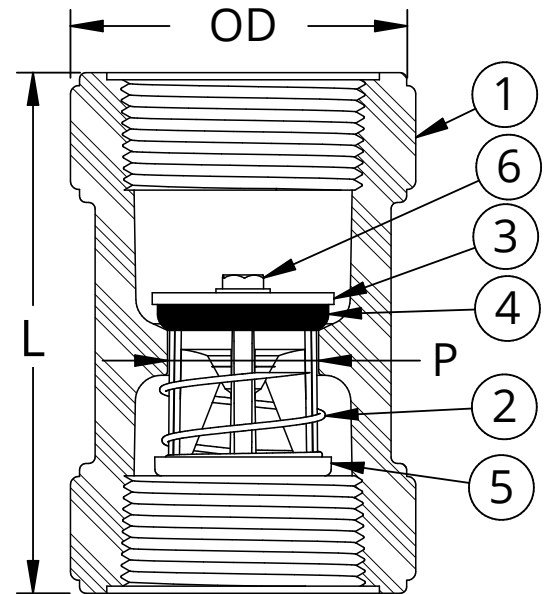

DIMENSIONS											
Part No.	Connection Size (CS)	Flow Coefficient (CV)	Length (L)		Outside Diameter (OD)		Port Diameter (P)		Maximum Load Capacity	Weight	
			in	mm	in	mm	in	mm		lbs	lbs
17PCV075	3/4" FPT	Not currently available	2.91	73.91	1.61	40.89	0.53	13.46	196	0.161	73.03
17PCV100	1" FPT		3.46	87.88	1.91	48.51	0.71	18.03	304	0.252	114.31
17PCV125	1-1/4" FPT		3.92	99.57	2.36	59.94	0.92	23.37	469	0.430	195.04
17PCV150	1-1/2" FPT		4.01	101.85	2.66	67.56	1.16	29.46	606	0.542	245.85
17PCV200	2" FPT		4.65	118.11	3.29	83.57	1.36	34.54	927	0.920	417.31

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310
Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164
VISIT US ONLINE AT BOSHART.COM

For more information on installation, adjustment, repair & operation, visit Boshart Knowledge Base at SUPPORT.BOSHART.COM



1710 THREADED AND 1710S SLIP SERIES PVC POPPET TYPE CHECK VALVE (SPRING ASSIST CLOSING)

FEATURES:

- Can be used vertically or horizontally
- Ball sealing design to be able to seal hermetically

SPECIFICATIONS:

- Threads conform to ANSI/ASME B1.20.1 Pipe Threads, General Purpose, Inch
- Tapered socket ends conform to ASTM D2466 for Poly (Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 40
- 2lbs. Spring Tension (3")
- Cracking Pressure is equal to or less than 1/2 PSI

CERTIFICATIONS:

- NSF/ANSI Standard 61 Certified (Drinking Water System Components - Health Effects) (3" only)
- NSF/ANSI Standard 372 Certified (Drinking Water System Components - Lead Content) (3" only)


RATINGS:

- Max Working Pressure: 100 PSI @ 73°F (23°C) (1/2"-2") (refer to temperature derating chart on page 2 if used above 73°F)
- Max Working Pressure: 160 PSI @ 72°F (22°C) (3") (refer to temperature derating chart on page 2 if used above 72°F)


- **WARNING:** These valves are not to be used submersible pump applications. These valves are not rated for maximum load capacity.



1710(S)-XX MATERIAL LIST		
No.	Name	Material
1	Outlet Body	UPVC (Unplasticized Polyvinyl Chloride)
2	Poppet	UPVC (Unplasticized Polyvinyl Chloride)
3	Body Seat	UPVC (Unplasticized Polyvinyl Chloride)
4	Spring	302 Stainless Steel
5	Seal	EPDM (Ethylene Propylene Diene Monomer)
6	Inlet Body	UPVC (Unplasticized Polyvinyl Chloride)

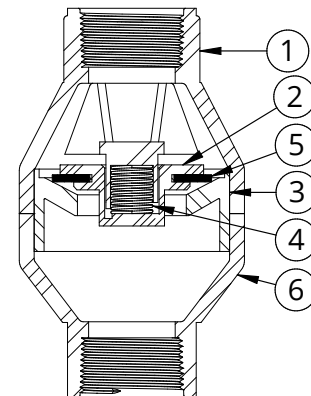

1710-30 MATERIAL LIST		
No.	Name	Material
1	Outlet Body	UPVC (Unplasticized Polyvinyl Chloride)
2	Poppet	UPVC (Unplasticized Polyvinyl Chloride)
3	Body Seat	UPVC (Unplasticized Polyvinyl Chloride)
4	Spring	302 Stainless Steel
5	Seal	EPDM (Ethylene Propylene Diene Monomer)
6	Spring Cup	UPVC (Unplasticized Polyvinyl Chloride)
7	Inlet Body	(Unplasticized Polyvinyl Chloride)


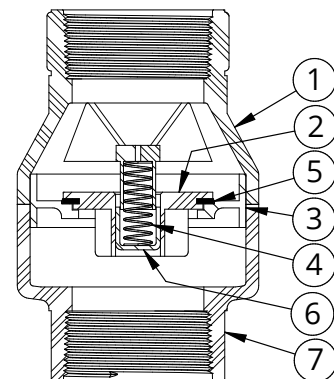


BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310
Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164
VISIT US ONLINE AT BOSHART.COM

For more information on installation,
adjustment, repair & operation, visit
Boshart Knowledge Base at
SUPPORT.BOSHART.COM




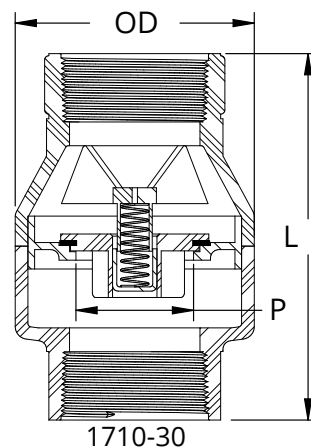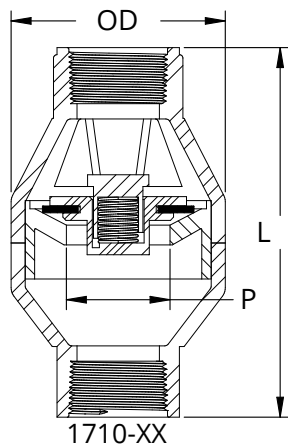

1710 THREADED SERIES DIMENSIONS

Part No.	Connection Size (CS)	Flow Coefficient (CV)	Length (L)		Outside Diameter (OD)		Port Diameter (P)		Weight	
			in	mm	in	mm	in	mm	lbs	grams
1710-05	1/2" FPT	Not currently available	4.13	105.00	1.50	38.00	0.85	21.70	0.32	145
1710-07	3/4" FPT		4.13	105.00	1.50	38.00	1.01	25.70	0.31	140
1710-10	1" FPT		5.24	133.00	1.89	48.00	1.25	31.67	0.55	250
1710-12	1-1/4" FPT		6.18	157.00	2.17	55.00	1.48	37.57	0.88	400
1710-15	1-1/2" FPT		6.18	157.00	2.48	63.00	1.87	47.54	0.95	430
1710-20	2" FPT		7.01	178.00	2.99	76.00	2.34	59.44	1.41	640
1710-30	3" FPT		8.66	219.96	5.65	143.51	2.78	70.61	3.30	1496

Flow Coefficient (CV) is the flow rate through a valve in the fully open position, which will produce a differential pressure of 1 PSI. It is defined as the volume of water in US gallons per minute (GPM) at 60°F (15.5°C)

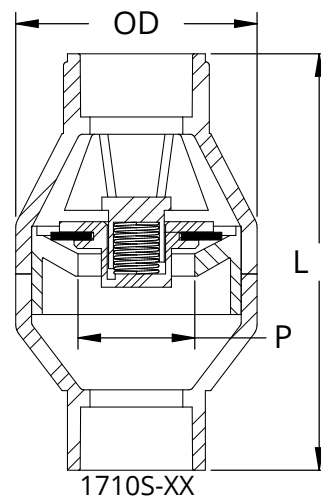

1710S SLIP SERIES DIMENSIONS

Part No.	Connection Size (CS)	Flow Coefficient (CV)	Length (L)		Outside Diameter (OD)		Port Diameter (P)		Weight	
			in	mm	in	mm	in	mm	lbs	grams
1710S-05	1/2"	Not currently available	4.13	105.00	1.50	38.00	0.85	21.70	0.32	144
1710S-07	3/4"		4.13	105.00	1.50	38.00	1.01	25.70	0.30	135
1710S-10	1"		5.24	133.00	1.89	48.00	1.25	31.67	0.54	245
1710S-12	1-1/4"		6.18	157.00	2.17	55.00	1.48	37.57	0.87	394
1710S-15	1-1/2"		6.18	157.00	2.48	63.00	1.87	47.54	0.92	418
1710S-20	2"		7.01	178.00	2.99	76.00	2.34	59.44	1.37	620

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310
Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164
VISIT US ONLINE AT BOSHART.COM

For more information on installation, adjustment, repair & operation, visit Boshart Knowledge Base at SUPPORT.BOSHART.COM

