

# PLASTIC FOOT VALVES

Foot valves are also referred to as one-way or non-return valves. Foot valves are commonly used with shallow/deep well jet, piston, centrifugal pump installations and various other applications. Their purpose is to prevent reverse flow and maintain system pressure in pressurized pumping systems. They are installed on the end of the suction line of any suction pump. The foot valve not only prevents fluid / water from flowing backward when the pump is off, the valve also keeps the fluid trapped in the suction pipe when the pump stops, sustaining the prime for the pump, and preventing pump burnout. Foot valves work automatically, opened by the pump's suction pulling the valve poppet/flapper open against a low tension spring or with gravity, normally  $\frac{1}{2}$  PSI or less cracking pressure (cracking pressure is the pressure it takes to open the valve). When the pump stops, the valve starts closing automatically with assistance of the spring or gravity as the flow slows, and is completely sealed before it comes to a full stop. This eliminates flow reversal which would cause the poppet/flapper to slam against the seat causing hydraulic shock or water hammer. Without a foot valve, gravity would cause the water or fluid to flow in the reverse direction resulting in the loss of prime and system pressure.



Available in  
3/4"-2" sizes



Available in 2-1/2"-6"  
sizes



Available in  
3/8" and 1/2"  
sizes

**\*When selecting a valve it is crucial to maintain flow velocity that does not exceed 5-7 feet per second.**

**\*\*In horizontal applications, check for "This side up" and place at the top and centered when installed\*\***

**For use with ASTM-D2239  
Polyethylene (PE) pipe**

**Flow Coefficient (CV)** is the flow rate through a valve in the fully open position, which will produce a differential pressure of 1 PSI.

It is defined as the volume of water in US gallons per minute (GPM) at 60°F (15.5°C)

## TEMPERATURE CORRECTION FACTOR FOR PVC VALVES

As temperature increases, working pressure decreases. The optimal working pressure for PVC valves is 150 PSI @ 73°F (22°C)

If the temperature increases above 73°F (22°C), use the PVC correction factor to determine working pressure.

Multiply the maximum working pressure by the correction factor.

Temperature	73°F (22°C)	90°F (32°C)	100°F (38°C)	110°F (38°C)	120°F (49°C)	130°F (54°C)	140°F (60°C)
PVC Correction Factor	1.00	1.00	1.00	0.83	0.66	0.50	0.33

**BOSHART**  
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

VISIT US ONLINE AT [BOSHART.COM](http://BOSHART.COM)



# 17PFV- SERIES - POPPET TYPE PLASTIC FOOT VALVES (SPRING ASSIST CLOSING)

## FEATURES:

- Tapered screen for easy installation
- Rapid closing spring loaded poppet to help eliminate back flow and water hammer
- Stainless Steel spring closes valve against pressure, eliminating flow reversal & minimizing water hammer/hydraulic shock
- Screen has slots (add slot sizes) to prevent debris larger than the (slot size) cannot go through
- The screens high open area ensures flow is not restricted
- Vertical installation is recommended. The valve will perform better and last longer if installed in vertical orientation. NOTE: If installed in the horizontal position, you must ensure the hinge pin is at top dead center to avoid risk of malfunction



## SPECIFICATIONS:

- Full port design ensures unrestricted flow
- 304 Stainless Steel hardware and rod
- Injection molded PVC body and screen
- NBR Sealing Gasket ensures a positive seal
- Threads conform to ANSI/ASME B1.20.1 Pipe Threads, General Purpose, Inch

## CERTIFICATIONS:


- NSF/ANSI Standard 372 Certified (Drinking Water System Components - Lead Content)

## RATINGS:

- Max Working Pressure: 150 PSI at 73°F (1034 kPa at 22°C) (For anything over 150 PSI @ 73°F, refer to the Temperature Correction Factor Chart)
- Minimum Back Flow Head pressure: 5 PSI
- Cracking Pressure is equal to or less than 1/2 PSI
- Max temperature rating: 140°F (60°C)

## MATERIAL LIST

No	Part Name	Material
1	Valve Body (Inlet)	Polyvinyl Chloride (PVC)
2	O-Ring	NBR (Nitrile Butadiene Rubber)
3	Spring	304 Stainless Steel
4	Valve Body Nut	Polyvinyl Chloride (PVC)
5	Poppet	Polyvinyl Chloride (PVC)
6	Inner Body (Port)	Polyvinyl Chloride (PVC)
7	Gasket Seal	NBR (Nitrile Butadiene Rubber)
8	Screen	Polyvinyl Chloride (PVC)

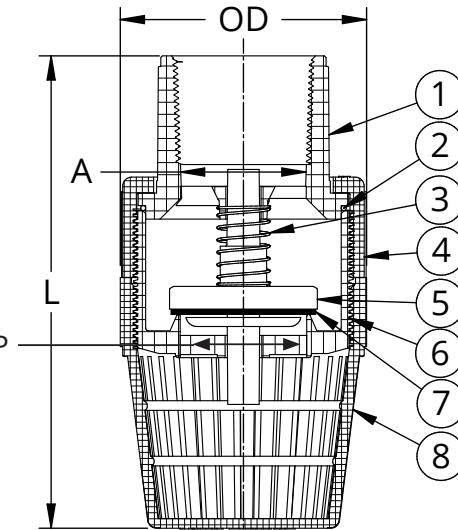

**Flow Coefficient (CV)** is the flow rate through a valve in the fully open position, which will produce a differential pressure of 1 PSI. It is defined as the volume of water in US gallons per minute (GPM) at 60°F (15.5°C).

## DIMENSIONS

Part No.	IC Connection	Flow Coefficient (CV)	L (Total Length)		OD		A		P (Port Dia.)		S (Slot Wdth)		Weight	
			in	mm	in	mm	in	mm	in	mm	in	mm	lbs	grams
17PFV-250	2 1/2" FPT	278	9.80	249	5.12	130	2.60	66	2.60	66	0.02	0.45	2.97	1347
17PFV-300	3" FPT	367	11.10	282	5.59	142	3.00	76	2.91	74	0.01	0.15	3.74	1696

Tolerance:  $\pm 2\%$

**BOSHART**  
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

VISIT US ONLINE AT [BOSHART.COM](http://BOSHART.COM)

