

SPDK SERIES - SUMP PUMP DISCHARGE KIT WITH MPT ADAPTER AND CLAMP

APPLICATIONS:

Sump pump discharge kits are used to transfer water from sump pump to a suitable location, typically 10-20 feet away from your house's foundation. They are intended for temporary dewatering.







FEATURES:


- Hose cutting increments every 8 feet.
- Tubing has annular corrugations.
- Kit includes one MPT x Barb adapter to connect sump pumps with 1-1/4" FPT or 1-1/2" FPT discharge connections.
- Includes one zinc plated steel clamp with 9/32" slotted hex head screw.
- Individually bagged in master carton.
- Packaging includes trilingual label.

SPECIFICATIONS/RATINGS:

- High Density Polyethylene (HDPE) material has a UV stabilizer.
- Designed for open discharge of water, internal pressure should not exceed 50 psi.

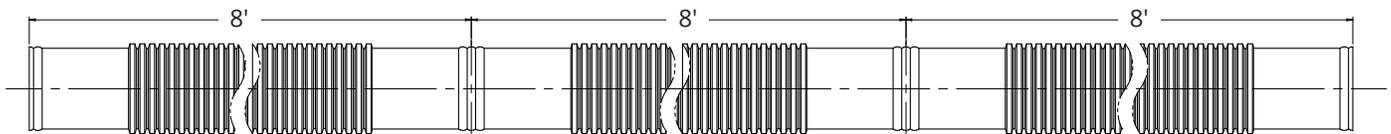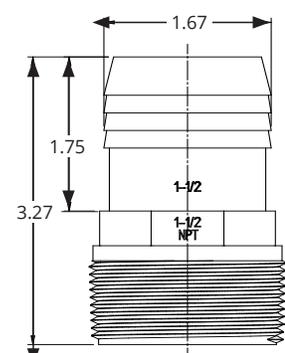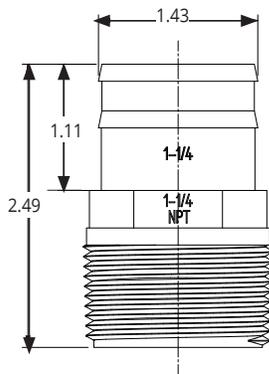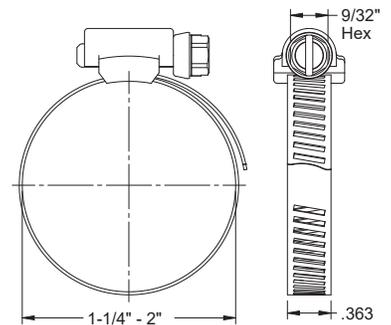

DIMENSIONS										
Part No.	Total Hose Length	Adapters	OD		L		ID		Weight	
		MPT x INS	in	mm	in	mm	in	mm	lb	grams
SPDK125-24	24'	1-1/4"	1.47	37.42	1.22	31.00	1.38	35.05	1.86	843.7
SPDK150-24		1-1/2"	1.91	48.44	2.09	53.00	1.66	42.16	2.90	1315.4

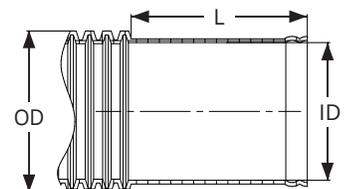

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

VISIT US ONLINE AT BOSHART.COM

For more information on installation, adjustment, repair & operation, visit Boshart Knowledge Base at SUPPORT.BOSHART.COM

