

CT(W) SERIES - CABLE TIES

Boshart's cable ties, which come in a variety of lengths, are versatile and can be used in a wide range of applications including but not limited to; electrical, automotive, aerospace, construction, HVAC, home improvement, outdoors, security and agriculture. They are effective in securing pump cable to the riser pipe between the cable guards.

FEATURES:


- Black nylon cable ties have added carbon to make them UV resistant and are suitable for indoor and all-weather outdoor applications. Resistant to oils, grease, and unlike natural (clear) nylon ties they are resistant to environmental contaminants.
- Natural (clear) nylon cable ties are not UV resistant and should not be used in direct sunlight. They are chemical, grease and oil-based product resistant, and suitable for indoor use.
- Cable ties are flexible but can become hard or soft depending on humidity in particular regions.
- Bent tip design for easier insertion.

SPECIFICATIONS/CERTIFICATIONS:

- NEMA Type 2, 21.
- ANSI/UL 94 Mtl Flame Rating V-2
- ANSI/UL Standard 62275 Certified
- Made from Nylon 6/6
- RoHS and Reach Compliant
- PFAS Free (Suitable for water well applications. Some regional codes require that the cable be fastened to the riser pipe at intervals of no greater than 10ft. apart.)

RATINGS:

- Temperature Range: -40°F to 185°F (-40°C to 85°C)
- Tensile Ratings: See chart on next page

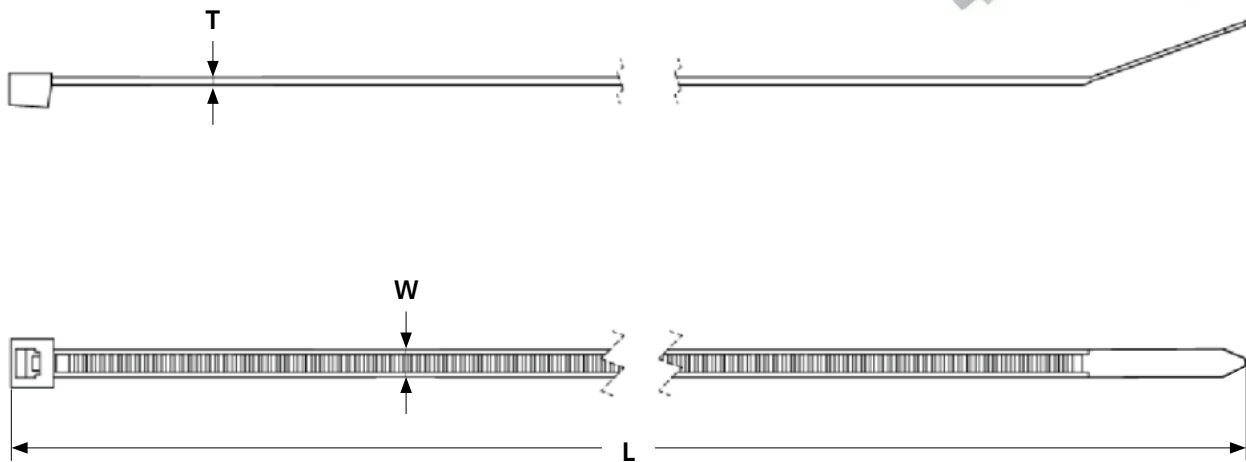

It is the user's responsibility to determine the product's suitability for its intended use. For full details, visit Boshart Industries [Reference Documents](#) for our User Safety Responsibility Statement and other important documents.

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

VISIT US ONLINE AT BOSHART.COM

For more information on installation, adjustment, repair & operation, visit Boshart Knowledge Base at SUPPORT.BOSHART.COM



SPECIFICATIONS & DIMENSIONS							
Part No.	Tensile Strength	Length		Width		Thickness	
	lbs	in	mm	in	mm	in	mm
Black Standard							
CTW018-04	18	4.00	101.6	0.094	2.4	0.033	0.85
CTW030-05.6	30	5.60	142.2	0.142	3.6	0.047	1.20
CTW040-08.5	40	8.50	215.9	0.142	3.6	0.047	1.20
CTW040-11.5	40	11.50	292.1	0.142	3.6	0.047	1.20
CTW040-14-5	40	14.50	368.3	0.142	3.6	0.047	1.20
Natural (Clear) Standard							
CT018-04	18	4.00	101.6	0.094	2.4	0.033	0.85
CT030-05.6	30	5.60	142.2	0.142	3.6	0.047	1.20
CT040-08.5	40	8.80	215.9	0.142	3.6	0.047	1.20
CT040-11.5	40	11.50	292.1	0.142	3.6	0.047	1.20
CT040-14.5	40	14.50	368.3	0.142	3.6	0.047	1.20
Black Heavy Duty							
CTW120-14.2	120	14.20	360.7	0.300	7.6	0.063	1.60
CTW120-24.2*	175*	24.20	614.7	0.354	9.0	0.071	1.80
Black Heavy Duty Lashing Tie **							
CTW175-36	175	36.00	914.4	0.354	9.0	0.071	1.80
CTW175-41	175	41.00	1041.4	0.354	9.0	0.071	1.80
*product was improved to meet higher tensile strength, there is no error in the spec.							
** Lashing ties are heavy duty and available in longer lengths for more more demanding or large-diameter bundles.							