


# 17FVNL SERIES NO LEAD BRONZE FOOT VALVE (THREADED)





## SPECIFICATION:

- Cast no lead bronze body and poppet
- NBR O-ring seal
- 304 stainless steel screen with .104" dia holes
- Threads conform to ANSI/ASME B1.20.1
- Max Pressure Rating: 200 PSI
- 200 PSI WOG Non-Shock - WOG pressure rating based on ambient temperature
- Max Temp Rating: 180°F (82°C)

## CERTIFICATION:

- NSF/ANSI Standard 372 Certified

MATERIAL LIST	
Part Name	Material
Hex Nut	Stainless Steel
Cup Washer	Stainless Steel
Spring	Stainless Steel
Body	No Lead Bronze
O-ring	NBR
Poppet	No Lead Bronze
Screw	Stainless Steel
Screen Cap	Stainless Steel
Screen	Stainless Steel

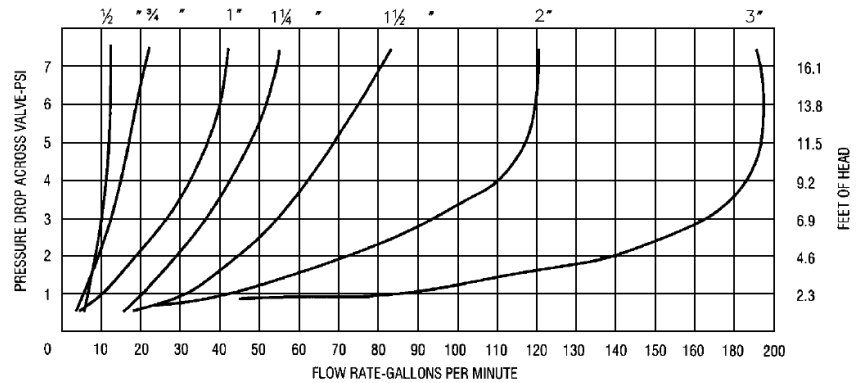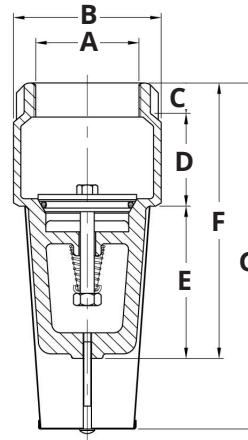

DIMENSIONS														
Part No.	A	B		C		D		E		F		G		Weight grams
		inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	
17FV050NL	1/2" FPT	1.22	30.99	0.37	9.50	0.83	21.18	1.57	40.00	2.78	70.79	3.22	81.78	160
17FV075NL	3/4" FPT	1.45	37.01	0.39	10.01	0.93	23.80	1.87	47.49	3.20	81.30	3.34	84.98	210
17FV100NL	1" FPT	1.73	43.99	0.45	11.51	1.14	29.01	2.14	54.40	3.74	94.99	4.61	117.20	320
17FV125NL	1-1/4" FPT	2.08	53.01	0.53	13.49	1.26	32.00	2.39	60.70	4.18	106.20	5.07	128.91	450
17FV150NL	1-1/2" FPT	2.36	59.99	0.61	15.49	1.35	34.49	3.09	78.51	5.05	128.50	5.86	148.89	610
17FV200NL	2" FPT	2.95	75.01	0.65	16.51	1.72	43.89	3.268	83.00	5.64	143.41	7.16	181.89	1040
17FV300NL	3" FPT	4.68	119.00	1.18	30.00	2.52	64.01	4.17	105.99	7.87	200.00	9.31	236.60	2960



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)