
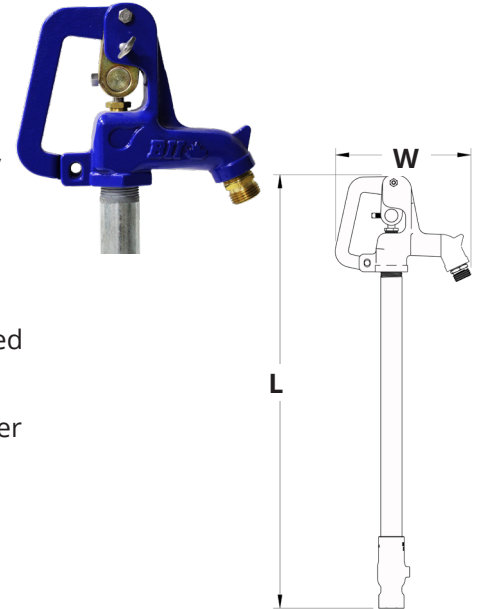


YHP(HC)CR-NL SERIES NO LEAD PREMIUM YARD HYDRANTS

SPECIFICATION:

- Heavy duty head with bucket hook and removable 3/4" GHT connector
- Large heavy duty handle has longer hand grip for comfortable operation. It can be held firmly in any position to regulate flow by means of a S.S. thumb bolt and has a locking eye allowing the hydrant to be pad-locked in the closed position.
- Polished operating rod reduces wear on the stem packing and provided maximum corrosion resistance.
- Double O-ring Sealing System provides a positive seal between the hydrant head and operating rod. The O-Rings are easily replaced, a great advantage over yard hydrants that use stem packing which is very difficult to remove and clean out of the head casting.
- One piece zinc plated pivot connector complete with a square head set screw allows for easy adjustment of the linkage.
- Double zinc plated draw straps provide excellent corrosion resistance; have smooth operation with very limited play in the linkage.
- Valve Body offers superior flow rates, a self draining bleeder port (tapped 1/8 FPT) prevents riser pipe and valve head from freezing.
- One piece plunger core with triple groove design ensuring that there is no chance of the rubber detaching from the core. Self-lubricating plunger prolongs it's life.
- 3/8" Steel Connecting Rod & Coupling.
- Max Pressure: 125 PSI
- Max Temperature: 120°F (48°C)



CERTIFICATION:

- ASTM A312 Sch. 40 Stand Pipe
- NSF/ANSI Standard 372 Certified

MATERIAL LIST	
Part Name	Material
Handle	Cast Iron
Head	Cast Iron
Coupling	Zinc Plated Steel
Operating Rod	Stainless Steel
O-Ring	Nitrile Buna-N
Packing Nut	Brass
Pivot Connector	Zinc Plated Steel
Set Screw	Stainless Steel
Draw Straps	Zinc Plated Steel
Lever Bolt	Stainless Steel
Locking Nut	Stainless Steel
Hose Bibb Adapter	Brass
Thumb Bolt	Stainless Steel
Plunger Assembly	Stainless Steel & Rubber
Valve Body	No Lead Bronze
Pipe	Stainless Steel

DIMENSIONS							
Part No.	Bury Depth	L		W		Weight grams	
		inches	mm	inches	mm		
3/4" FPT Inlet	YHPCR-01NL	1'	45.00	1143.00	8.40	213.36	5856
	YHPCR-015NL	1-1/2'	51.00	1295.40	8.40	213.36	6319
	YHPCR-02NL	2'	57.00	1447.80	8.40	213.36	6781
	YHPCR-03NL	3'	69.00	1752.60	8.40	213.36	7707
	YHPCR-04NL	4'	81.00	2057.40	8.40	213.36	8632
	YHPCR-05NL	5'	93.00	2362.20	8.40	213.36	9557
	YHPCR-06NL	6'	105.00	2667.00	8.40	213.36	10483
	YHPCR-07NL	7'	117.00	2971.80	8.40	213.36	11408
	YHPCR-08NL	8'	129.00	3276.60	8.40	213.36	12333
	YHPCR-10NL	10'	153.00	3886.20	8.40	213.36	14184
1" FPT Inlet	YHPHCCR-01NL	1'	45.00	1143.00	8.40	213.36	5919
	YHPHCCR-015NL	1-1/2'	51.00	1295.40	8.40	213.36	6382
	YHPHCCR-02NL	2'	57.00	1447.80	8.40	213.36	6845
	YHPHCCR-03NL	3'	69.00	1752.60	8.40	213.36	7770
	YHPHCCR-04NL	4'	81.00	2057.40	8.40	213.36	8695
	YHPHCCR-05NL	5'	93.00	2362.20	8.40	213.36	9621
	YHPHCCR-06NL	6'	105.00	2667.00	8.40	213.36	10546
	YHPHCCR-07NL	7'	117.00	2971.80	8.40	213.36	11471
	YHPHCCR-08NL	8'	129.00	3276.60	8.40	213.36	12397
	YHPHCCR-10NL	10'	153.00	3886.20	8.40	213.36	14247



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com