

GAC/GACN SERIES 1/2" I.D. GAS APPLICATION CONNECTORS

FEATURES:

- Max Operating Temperature: 150°F (65.5°C)
- Max Operating Pressure: 0.5 psi (3.45kPa)
- Hydrostatic Burst Pressure: 250psi (1725 kPa)
- Easy to install and have deep corrugations to enhance their flexibility
- Provides protection from ammonia, acids, chlorine, and other corrosive chemicals as well as environment influences such as UV rays and sea salt

CERTIFICATION:

- ANSI Z21.24/CSA 6.10 Connectors For Gas Appliances
- ANSI Z21.24a/CSA 6.10a Addenda A to Connectors For Gas Appliances
- ANSI Z21.75/CSA 6.27 Connectors For Outdoor Gas Appliances And Manufactured Homes
- ANSI Z21.75/CSA 6.27 Addenda A to Connectors For Outdoor Gas Appliances And Manufactured Homes





GAC Series with yellow poly coating



GACN Series without coating



Part Name	Material
Adapter	Zinc Plated Steel
Nut	Zinc Plated Steel
Corrugation	(Yellow Ploy Coated) SS304 Stainless Steel

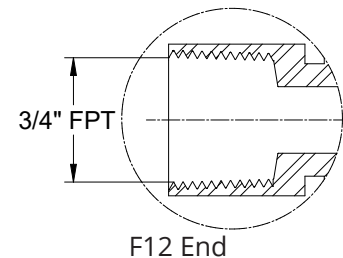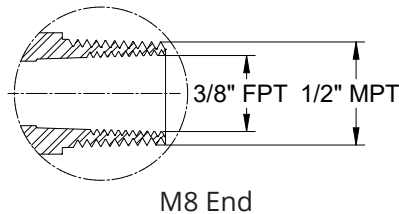

Minimum Flow Capacity

Straight Length capacity-BTU/hr.(W), 0.64 SG, 1000 BTU/cu.ft.(37.2MJ per cu meter) at 0.5 inch water column (125 Pa) pressure drop

Configuration	Nominal Length							
	Nominal ID inches	12"	18"	24"	36"	48"	60"	72"
GAC/GACN	1/2	180,000	164,200	150,000	125,000	106,000	93,200	86,000


BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com

GAC/GACN SERIES GAS APPLICATION CONNECTORS

Part No.		Adapter Size	Nominal Length	L
Yellow Coating	Without Coating			
GAC-F8-12	GACN-F8-12	1/2"	12"	10"
GAC-F8-18	GACN-F8-18	1/2"	18"	16"
GAC-F8-24	GACN-F8-24	1/2"	24"	22"
GAC-F8-36	GACN-F8-36	1/2"	36"	34"
GAC-F8-48	GACN-F8-48	1/2"	48"	46"
GAC-F8-60	GACN-F8-60	1/2"	60"	58"
GAC-F8-72	GACN-F8-72	1/2"	72"	70"
GAC-F12-12	GACN-F12-12	3/4"	12"	10"
GAC-F12-18	GACN-F12-18	3/4"	18"	16"
GAC-F12-24	GACN-F12-24	3/4"	24"	22"
GAC-F12-36	GACN-F12-36	3/4"	36"	34"
GAC-F12-48	GACN-F12-48	3/4"	48"	46"
GAC-F12-60	GACN-F12-60	3/4"	60"	58"
GAC-F12-72	GACN-F12-72	3/4"	72"	70"
GAC-F8M8-12	GACN-F8M8-12	1/2"	12"	10"
GAC-F8M8-18	GACN-F8M8-18	1/2"	18"	16"
GAC-F8M8-24	GACN-F8M8-24	1/2"	24"	22"
GAC-F8M8-36	GACN-F8M8-36	1/2"	36"	34"
GAC-F8M8-48	GACN-F8M8-48	1/2"	48"	46"
GAC-F8M8-60	GACN-F8M8-60	1/2"	60"	58"
GAC-F8M8-72	GACN-F8M8-72	1/2"	72"	70"
GAC-F12M8-24	GACN-F12M8-24	3/4" x 1/2"	24"	22"
GAC-F12M8-36	GACN-F12M8-36	3/4" x 1/2"	36"	34"
GAC-F12M8-48	GACN-F12M8-48	3/4" x 1/2"	48"	46"
GAC-F12M8-60	GACN-F12M8-60	3/4" x 1/2"	60"	58"
GAC-F12M8-72	GACN-F12M8-72	3/4" x 1/2"	72"	70"
GAC-M8-12	GACN-M8-12	1/2"	12"	10"
GAC-M8-18	GACN-M8-18	1/2"	18"	16"
GAC-M8-24	GACN-M8-24	1/2"	24"	22"
GAC-M8-36	GACN-M8-36	1/2"	36"	34"
GAC-M8-48	GACN-M8-48	1/2"	48"	46"
GAC-M8-60	GACN-M8-60	1/2"	60"	58"
GAC-M8-72	GACN-M8-72	1/2"	72"	70"

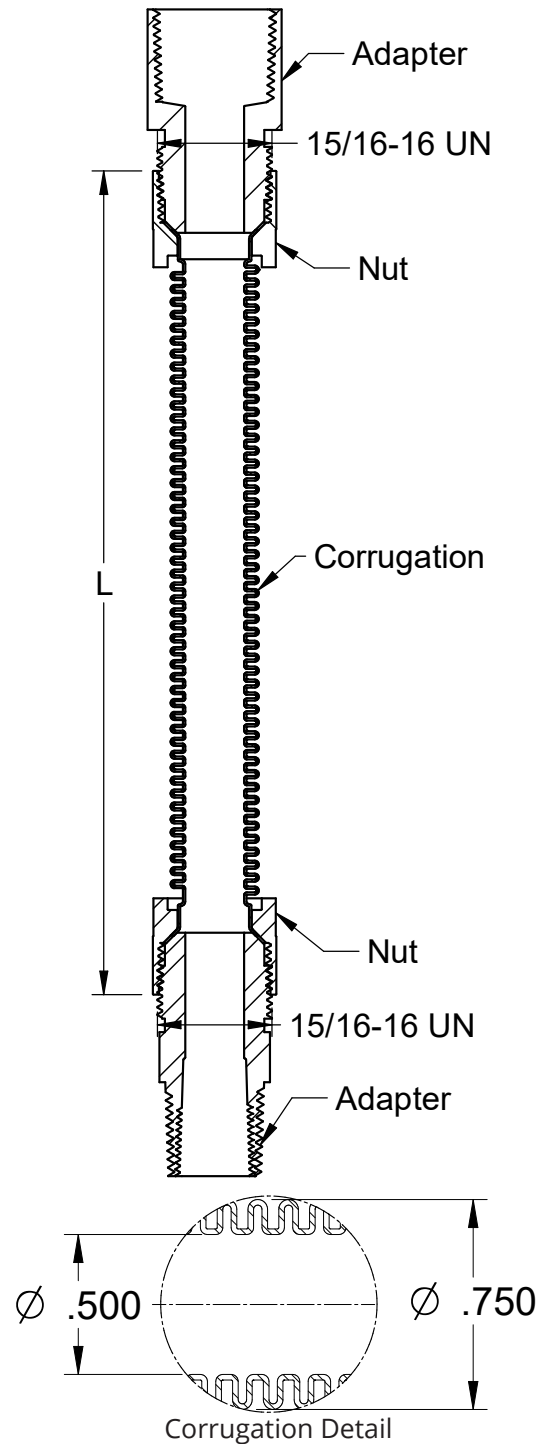

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com