

GAC SERIES - 1/2" I.D. POLY COATED GAS APPLICATION CONNECTORS

It is the user's responsibility to determine the product's suitability for its intended use. For full details, visit Boshart Industries [Reference Documents](#) for our User Safety Responsibility Statement and other important documents.

FEATURES:


- Easy to install and have deep corrugations to enhance their flexibility
- Provides protection from ammonia, acids, chlorine, and other corrosive chemicals as well as environment influences such as UV rays and sea salt

CERTIFICATIONS:


- ANSI Z21.24/CSA 6.10 Connectors For Gas Appliances
- ANSI Z21.24a/CSA 6.10a Addenda A to Connectors For Gas Appliances
- ANSI Z21.75/CSA 6.27 Connectors For Outdoor Gas Appliances And Manufactured Homes
- ANSI Z21.75/CSA 6.27 Addenda A to Connectors For Outdoor Gas Appliances And Manufactured Homes

RATINGS:


- Max Operating Temperature: 150°F (65.5°C)
- Max Operating Pressure: 0.5 psi (3.45kPa)
- Hydrostatic Burst Pressure: 250psi (1725 kPa)

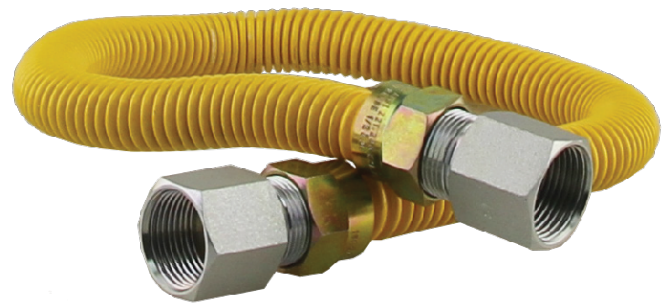

Part Name	Material
Adapter	Zinc Plated Steel
Nut	Zinc Plated Steel
Corrugation	(Yellow Poly Coated) SS304 Stainless Steel

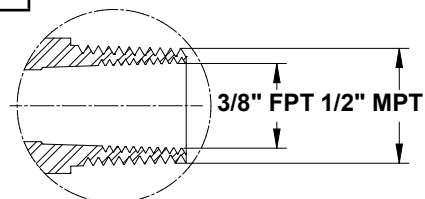

M8 End

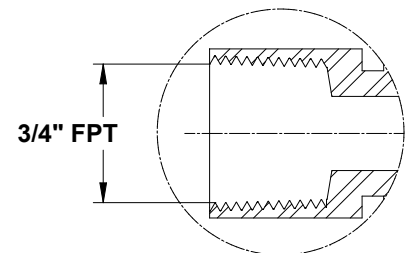

F12 End

Minimum Flow Capacity

Straight Length capacity-BTU/hr.(W), 0.64 SG, 1000 BTU/cu.ft.(37.2MJ per cu meter) at 0.5 inch water column (125 Pa) pressure drop

Configuration	Nominal Length							
	Nominal ID (inches)	12"	18"	24"	36"	48"	60"	72"
GAC	1/2	180,000	164,200	150,000	125,000	106,000	93,200	86,000



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0

Tel: 800-561-3164

VISIT US ONLINE AT BOSHART.COM



Part No.	Adapter Size	Nominal Length	L
GAC-F8-12	1/2"	12"	10"
GAC-F8-18	1/2"	18"	16"
GAC-F8-24	1/2"	24"	22"
GAC-F8-36	1/2"	36"	34"
GAC-F8-48	1/2"	48"	46"
GAC-F8-60	1/2"	60"	58"
GAC-F8-72	1/2"	72"	70"
GAC-F12-12	3/4"	12"	10"
GAC-F12-18	3/4"	18"	16"
GAC-F12-24	3/4"	24"	22"
GAC-F12-36	3/4"	36"	34"
GAC-F12-48	3/4"	48"	46"
GAC-F12-60	3/4"	60"	58"
GAC-F12-72	3/4"	72"	70"
GAC-F8M8-12	1/2"	12"	10"
GAC-F8M8-18	1/2"	18"	16"
GAC-F8M8-24	1/2"	24"	22"
GAC-F8M8-36	1/2"	36"	34"
GAC-F8M8-48	1/2"	48"	46"
GAC-F8M8-60	1/2"	60"	58"
GAC-F8M8-72	1/2"	72"	70"
GAC-F12M8-24	3/4" x 1/2"	24"	22"
GAC-F12M8-36	3/4" x 1/2"	36"	34"
GAC-F12M8-48	3/4" x 1/2"	48"	46"
GAC-F12M8-60	3/4" x 1/2"	60"	58"
GAC-F12M8-72	3/4" x 1/2"	72"	70"
GAC-M8-12	1/2"	12"	10"
GAC-M8-18	1/2"	18"	16"
GAC-M8-24	1/2"	24"	22"
GAC-M8-36	1/2"	36"	34"
GAC-M8-48	1/2"	48"	46"
GAC-M8-60	1/2"	60"	58"
GAC-M8-72	1/2"	72"	70"

